


# Subminiature Load Cell

**Model 8413**

**Model 8414 with overload protection**

Code:	8413 EN
Delivery:	ex stock
Warranty:	24 months

CAD data 2D/3D for this sensor:  
Download directly at [www.traceparts.com](http://www.traceparts.com)  
Info: refer to data sheet 80-CAD-EN

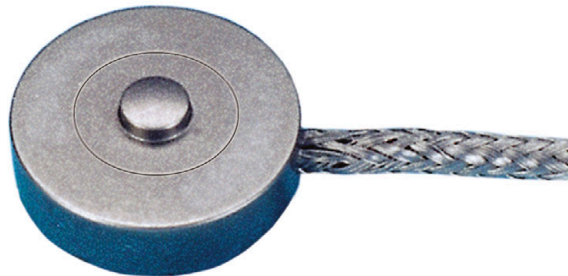

- Especially flat design
- Small measuring ranges
- Made of stainless steel
- High resonance frequencies
- Accuracy from < 0.5 % F.S.
- Model 8414 with mechanical overload protection

## Application

These subminiature compression load cells have to be installed very carefully. They must be mounted on a flat and even surface using contact adhesive, wax or a small laminated spring to hold the sensor body down. Preloads which could have a direct impact on the sensor body, and clamping the sensor on its sheath are to be avoided.

The measuring force has to be applied centrally and free from lateral forces which have to be kept away from the sensor using levers or guideways. Mounting must always be performed manually without use of power tools. Overload damage during the mounting process can be passively prevented by electrically connecting the sensor and displaying the force value.

## Description

The subminiature compression load cells are flat, cylindrical discs with covered bottoms. The load application button for receiving the compression forces is an integrated part of the top, which is the sensor's membrane. The strain gauges are applied on the back and wired to a full Wheatstone bridge, which results in voltage output proportional to the load applied.

The connecting cable of the load cell features a covered correction network on a small board. The sensor's temperature compensation is installed here.

Due to its extremely small dimensions, this model is perfect for use in applications with limited space. The small diameters result in high resonance frequencies.

**Technical Data**

**Model 8413**

Order Code	Measuring Range	Dimensions [mm]				Resonance Frequency [kHz]	Nominal Value [mV/V]	Weight without Cable [g]
		Ø D 1	Ø D 2	H 1	H 2			
8413- 2.5	0 ... 2.5 N	9.7	2.3	3.4	2.6	3.0	15	1.2
8413- 5	0 ... 5 N	9.7	2.3	3.4	2.6	4.0	15	1.2
8413- 10	0 ... 10 N	9.7	2.3	3.4	2.6	7.0	1.5	1.2
8413- 20	0 ... 20 N	9.7	2.3	3.4	2.6	11.0	2	1.2
8413- 50	0 ... 50 N	9.7	2.3	3.4	2.6	18.0	2	1.2
8413- 100	0 ... 100 N	9.7	2.3	3.4	2.6	26.0	2	1.2
8413- 200	0 ... 200 N	9.7	2.3	3.4	2.6	40.0	2	1.2
8413- 500	0 ... 500 N	12.7	3.0	3.8	3.3	67.0	2	3.2
8413- 1000	0 ... 1000 N	12.7	3.0	3.8	3.3	85.0	2	3.3
8413- 2000	0 ... 2000 N	19.1	6.4	6.4	5.7	98.0	2	10.3
8413- 5000	0 ... 5000 N	19.1	6.4	6.4	5.7	167.0	2	10.3

**Model 8414 with overload protection**

Order Code	Measuring Range	Dimensions [mm]				Resonance Frequency [kHz]	Nominal Value [mV/V]	Weight without Cable [g]
		Ø D 1	Ø D 2	H 1	H 2			
8414- 2.5	0 ... 2.5 N	9.4	2.3	6.4	5.8	3.0	12	3.8
8414- 5	0 ... 5 N	9.4	2.3	6.4	5.8	4.0	12	3.8
8414- 10	0 ... 10 N	9.4	2.3	6.4	5.8	7.0	1	3.8
8414- 20	0 ... 20 N	9.4	2.3	6.4	5.8	11.0	1	3.8
8414- 50	0 ... 50 N	9.4	2.3	6.4	5.8	18.0	1	3.8
8414- 100	0 ... 100 N	9.4	2.3	6.4	5.8	26.0	1	3.8

**Electrical values**

Bridge resistance (full bridge):  
 measuring ranges ≤ 0 ... 5 N semiconductor 500 Ω, nominal  
 measuring ranges ≥ 0 ... 10 N foil 350 Ω, nominal

Excitation: 5 V DC

Nominal value: refer to table

Insulation resistance: > 5000 MΩ by 50 V DC

Shunt calibration resistor: 59 kΩ ± 0.1 %  
 The bridge output voltage caused by a shunt of this value is shown in the calibration certificate.

**Environmental conditions**

Range of operating temperature: - 55 °C ... + 120 °C

Nominal temperature range: + 15 °C ... + 70 °C

Influence of temperature on zero: ≤ ± 0.02 % F.S./K

Influence of temperature on sensitivity: < + 0.02 % Rdg./K

**Mechanical values**

Non-linearity: < ± 0.5 % F.S.

Accuracy: < ± 0.5 % F.S.

Non-repeatability: < ± 0.1 % F.S.

Deflection full scale:  
 measuring ranges ≤ 0 ... 5 N 13 µm ... 38 µm  
 measuring ranges ≥ 0 ... 10 N 25 µm ... 76 µm

Static overload capacity: 150 % of nominal load

Maximum static overload stop: 500 % of nominal load

Dynamic load: recommended 70 % of nominal load  
 maximum 100 % of nominal load

Material: stainless steel 17-4 PH (similar to 1.4542)

**Electrical connection**

Highly flexible teflon isolated with open ends for soldering. Length approx. 1.5 m. Steep board, width approx. 7 mm, length 50 mm, for bridge balance, calibration and temperature compensation approx. 0.6 m away from the sensor body. Cable shielding between sensor and circuit board.


Protecting class: acc. to EN 60529 IP54

Wiring code: red excitation voltage positive  
 black excitation voltage negative  
 green signal output negative  
 white signal output positive

Dimensions: refer to table and dimensional drawing

Weight: refer to table

**Dimensional drawing models 8413 and 8414**

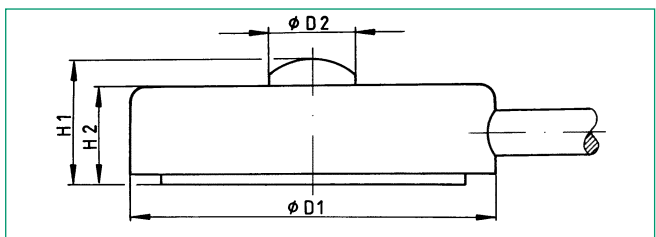

The CAD drawing (3D/2D) for this sensor can be imported online directly into your CAD system.

Download via [www.burster.com](http://www.burster.com) or directly at [www.traceparts.com](http://www.traceparts.com). For further information about the burster traceparts cooperation refer to data sheet 80-CAD-EN.

**Order Information**

Subminiature load cell, measuring range 0 ... 10 N

**Model 8413-10**

**Accessories**

Connector  
 12 pin, suitable to all burster desktop devices **Model 9941**  
 9 pin, suitable to SENSORMASTER and DIGIFORCE® **Model 9900-V209**

Mounting of mating connector to conductor cable

**Oder Code: 99004**

Only for connection of sensor to SENSORMASTER Model 9163

desktop housing **Order Code: 99002**

Amplifiers, sensor supply instruments and process controllers as e.g. digital indicator model 9163, model 9243 or DIGIFORCE® 9307

refer to section 9 of the catalog.

**Option**

Standardization of the nominal value only for measuring range ≥ 0 ... 10 N in the connection cable to 1.0 mV/V ± 0.25 %, **...-V010**

**Factory Calibration Certificate (WKS)**

Calibration of a load cell separately as well as connected to an indicator. Standard is a certificate with 11 points, starting at zero, running up and down in 20% increments covering the complete measuring range for preferential direction. Special calibrations on request. Calculation of costs by base price plus additional costs per point.

**Order Code 84WKS-84...**